

E4172M - Elipta Compact Screw-mount Tree spotlight



Installation notes

Ensure mains supply is isolated prior to installation of this product.

Unscrew the bezel and insert lamp. Apply small amount of grease to thread and screw back on to the body of the light. Screw the mount onto the Spotlight and place the luminaire in desired location.

Cable connections can be made using a T9966 IP68 in-line connector or any IP rated junction box



Recommended 12 fittings per circuit.

Refer to the instruction manual for further guidance.

Note – This product must be installed by a qualified electrician.

Part code	E4172M
Diffuser	Clear
Dimensions (mm)	Body – 111x63 Mount – 69 x 21
Cable length (mm)	2000
Construction	Aluminium
Finish	Rustic Brown Powder coat
Class	Class I
IP rating	IP65
Maximum wattage	LED - 10W
Lamp base	GU10
Lamp included	No
Dimmable	Dependant on lamp
Input voltage	240V 50Hz
Net weight (g)	627
Gross weight (g)	681
Warranty	2 Years
Manufactured in accordance with	BS EN 60598
Origin of manufacture	PRC



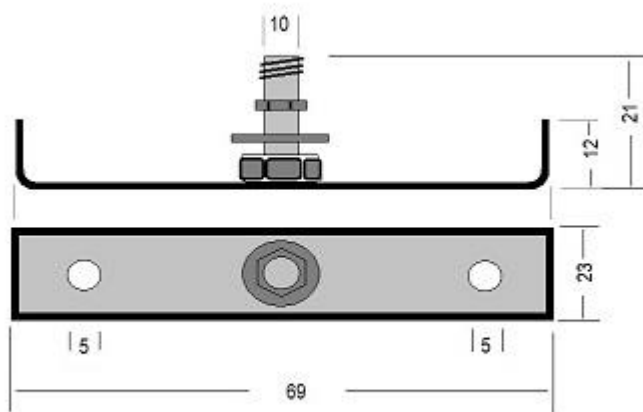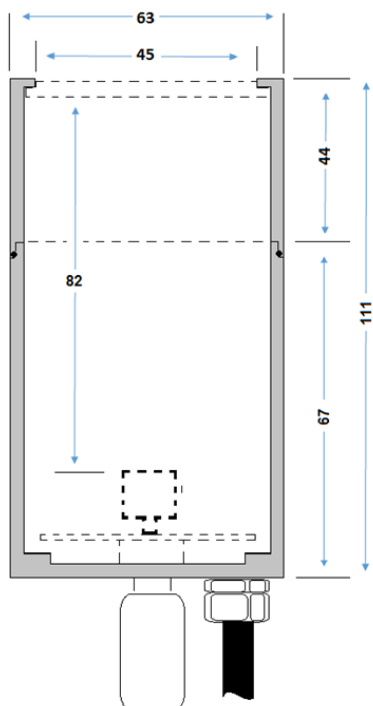

2 YEAR WARRANTY

Powder Coated Aluminium Body & Fitting

Exclusions: Damage by machinery, animals or the use of incorrect cleaning materials. Corrosion due to exposure to salt or chlorine. Damage due to incorrect installation practices. Responsibility for 3rd party cost; indirect or consequential loss.

2 YEAR WARRANTY

Internal wiring & lampholder

Exclusions: Damage due to incorrect lamp fitting or lamps above specification. Responsibility for 3rd party cost; indirect or consequential loss